


### Customized Depth

Fix rods back to the wall using **RP** - cut rod length and fix with **RS05**.

For better stability fix cables back to the wall using **RP** and 6mm rods attached to cables using **CS05** support.

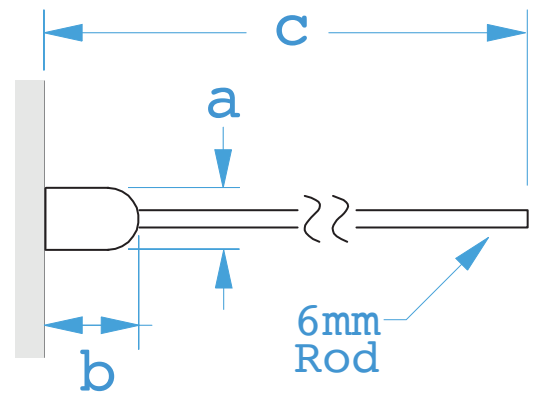

## FIXING FOR 6MM RODS - PUSH FIT

Part #	Diameter (a)	Length (b)	Rod Length (c)
<b>RP</b>	18mm (45/64")	22mm (55/64")	*Very per application *Use R500P, R1000P Rods and cut to size (Not-Included)
	<b>Finish</b>	<b>Load Limit</b>	<b>Allen Wrench</b>
	Satin Chrome	11.5kg (25lb) each *Subject to fixing	1.5mm Metric